

BUNDLE:


(4) 5' Legs (4) #2A Adapters (3) #6A (2) #9A (4) #4A (1) #3A

HARDWARE BOX:

(4) steps (10) 5/16" x 2-3/4" bolts (6) 5/16" x 1-3/4" bolts (2) 5/16" x 3/4" bolts (18) 5/16" hex nuts

Open End 1/2" Socket Wrench Deep 1/2" Socket Wrench 7/16" Wrench

IMPORTANT: Follow procedure below. Numbers are written on parts for easy identification. Locate all parts, bolts and nuts in direction indicated. NOTE: Position ladder mounting holes in line for proper location of ladder.

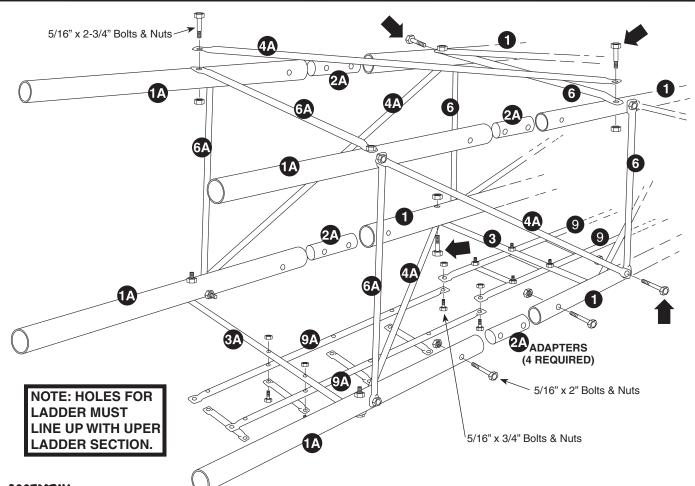

ASSEMBLY:

- Assemble top 10' section of stand and *BLYND* per instructions included with each, excluding step 10. NOTE: Do not install four bolts indicated by arrows (1) in illustration. If previously installed – remove and retain these bolts.
- Assemble four 5' leg extensions (#1A) to the legs (#1) with the four adapters (#2A) and eight 5/16" x 2" bolts and nuts.
- S Locate extension cross brace (#4A) in position over 10' existing frame members (#3 & #6) and secure with one 5/16" x 2-3/4" bolt and nut.
- Place extension frame member (#3A with ladder holes) between leg extension (#1A) and cross member extension (#4A). Secure to leg with one 5/16" x 2-3/4" bolt and nut. Secure opposite end of cross member to leg with one 5/16" x 2-3/4" bolt and nut.
- Follow same procedure for remaining three frame members (#6A).
- 6 Assemble ladder side rail extensions (#9A) to bottom of upper rails (#9) with two 5/16" x 3/4" bolts and nuts.
- Attach ladder rails (#9A) and one rung to cross member (#3A) with 5/16" x 2-3/4" bolts and nuts.
- Secure three remaining rungs with six 5/16" x 1-3/4" bolts and nuts.

NOTE: Franks Manufacturing assumes no liability for injury or damage to persons or property resulting from the use of its products or services. The products that we sell must be assembled, installed, anchored and used with care, caution and common sense. Anchoring the stand is the owners responsibility.

